

# MINI BRICK



The base  
of any  
Lighting Design,  
just smaller.

- 12 x OSRAM OSTAR STAGE N RGBW LEDs
- HIGH-QUALITY COLOR MIXING
- QUICKLY INTERCHANGEABLE BEAM ANGLES
- IP65 RATED
- DESIGNED FOR BOTH TEMPORARY AND PERMANENT INSTALLATIONS
- BUILT-IN FULL-RANGE PSU
- EXTREMELY COMPACT AND LIGHTWEIGHT
- THE BEST VALUE FOR MONEY



The MINI BRICK is a powerful, self-contained, IP65 LED Wash light in an ultra-compact case. MINI BRICK is suitable for various purposes, offering a range of projection angles quickly interchangeable (no tools required). MINI BRICK comes with an IP65 power cable plus 2 DMX cables with M / F XLR connectors (all IP65), that make it perfect for temporary lighting applications, but also for safe long-lasting installations. Built with top quality components, MINI BRICK gives you the best value for money by efficient design and full production automation.



# MINI BRICK



## LED TECHNOLOGY |

12 x Osram Ostar Stage N RGBW LEDs

## OPTICAL GROUP |

8° projection angle  
Range of quick-mounting holographic filters included: 20° / 40° / 60x10° (no mounting tools required)  
Uniform projection on surfaces

## COLOR GENERATION |

16 million colors  
Wide palette of pure uniform whites with variable linear color temperature (2700 K – 8000 K)

## INTERFACE / CONTROL / PROGRAMMING |

4-digit 7-segment LED display + 4 soft keys: control/management/monitoring of the main parameters  
Controlled via DMX 512 and RDM standard digital communication protocols  
Internal operating system updatable via DTS RED BOX interface

## DMX |

10 DMX channels

## POWER SUPPLY |

Built-in full-range PSU  
100-240 Vac 50/60 Hz  
Power consumption: 200 VA max

## CONNECTIONS |

Power supply: 3 x 1 sq mm cable (1.5 m length)  
DMX In/Out: 0.7 m cable with XLR  
5 pins IP65 connector

## OPERATING AMBIENT TEMPERATURE |

-10° / 40°

## PHYSICAL |


IP65  
IK protection degree: IK09  
Weight: 6.5 Kg  
Dimensions: 294 x 160 x 262 mm

## INTERNATIONAL CERTIFICATIONS |

CE Certification

## INCLUDED ITEMS |

1 x Holographic filter 20° (code 0506A043.D12)  
1 x Holographic filter 40° (code 0506A045.D12)  
1 x Holographic filter 60°x10° (code 0506A092.D12)  
1 x PowerCON TRUE1 female cable connector (code 0520P066)  
1 x PowerCON TRUE1 male cable connector (code 0520P067)  
1 x Display UV protection (code 03.LA.218)  
1 x Omega bracket with "Fast Lock" – already mounted on the unit (code 02K00467)

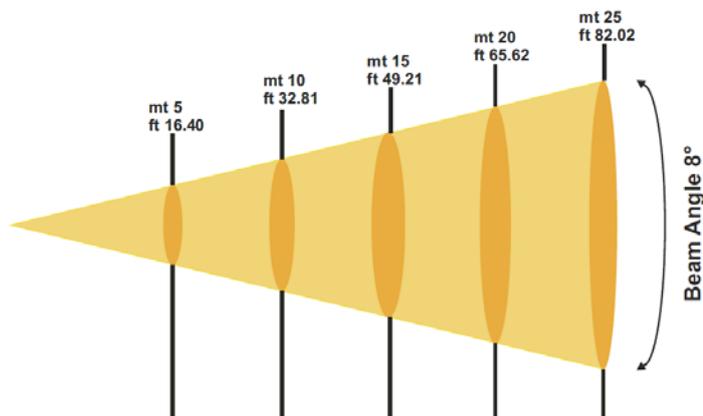

RED	Lux center [lx]	2384	596	265	149	95
	Foot candles [fc]	222	55	25	14	9
GREEN	Lux center [lx]	4310	1078	479	269	172
	Foot candles [fc]	401	100	45	25	16
BLUE	Lux center [lx]	315	79	35	20	13
	Foot candles [fc]	29	7	3	2	1
WHITE	Lux center [lx]	5282	1321	587	330	211
	Foot candles [fc]	491	123	55	31	20
FULL RGBW	Lux center [lx]	6767	1692	752	423	271
	Foot candles [fc]	629	157	70	39	25
BEAM ANGLE	Diameter [cm]	70	140	210	280	350
	Diameter [ft]	2,29	4,59	6,88	9,18	11,47