



ARTEMIO PROFILE

THE ULTRA COMPACT PROFILER:
HIGH LUMINOSITY WITH ONLY 25 W

ARTEMIO PROFILE is a **LED-based ultra compact profile** featured with an **internal four-shutter shaping system** and 4 interchangeable lenses for different beam angles. The unit is equipped with a **single high-power 25 W white LED source**. The unit is powered by external PSU as DRIVENET 416 / 832 / 1664 or DRIVENET 28C DIN.

PRELIMINARY INFORMATION



CE

ARTEMIO 3000 K
03.ART002

ARTEMIO 4000 K
03.ART009

ARTEMIO 5000 K
03.ART011

OPTICAL
GROUP:

ULTRA-NARROW 8°
03.ART003

NARROW 15°
03.ART004

MEDIUM 24°
03.ART005

WIDE 33°
03.ART006

PRELIMINARY INFORMATION

OUTPUT

- Single high-power White 3000 K LED
- 1,830 Lumens
- CRI >90
- Also available with 4000 K or 5000 K LED
- LED lifespan: 50,000 hours (70% lumen output)

OPTICAL GROUP

- 4 interchangeable lenses for different beam angles
- Ultra-Narrow (8°)

- Narrow (15°)
- Medium (24°)
- Wide (33°)
- Linear Focus with double optical condenser lens

CONTROL

- On-Off / DMX 512 / RDM / DALI / Art-Net (external driver is required)

POWER SUPPLY

- External PSU: DRIVENET 416 / 832 PSU

(full-range 100-240Vac 50-60 Hz)

- DRIVENET 1664 PSU (range 180-240Vac 50-60 Hz)
- DRIVENET 28C DIN
- External 36Vdc 700mA max Constant Current PSU
- Power consumption: 25 W max

CONNECTIONS



- Power supply: 2 x 0,75 mm² cable (2 m length)

OPERATING TEMPERATURE

-10° / 40°C

PHYSICAL

- IP20
- Internal system with four removable shutters
- Adjusting yoke
- Weight: 1.1 Kg (2.43 lbs)
- Finishing: Black

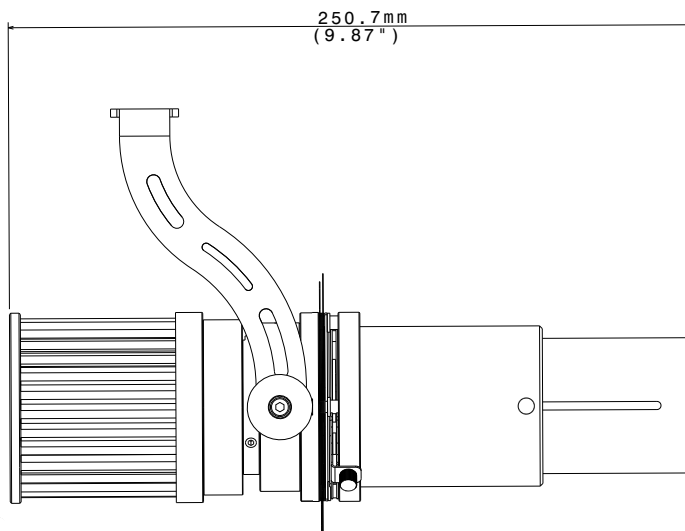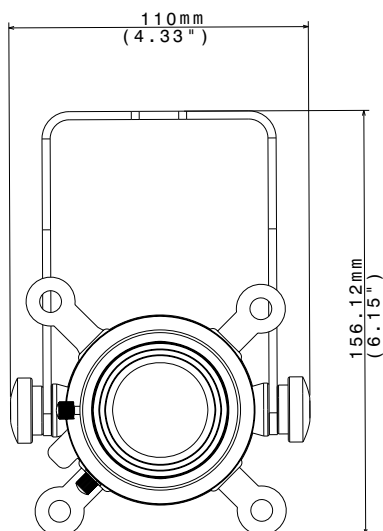

CONNECTIONS CHART

	DRIVENET 416	DRIVENET 832	DRIVENET 1664	DRIVENET 28C DIN
Artemio Profile	Max 16 (4 items per output)	Max 32 (4 items per output)	Max 64 (4 items per output)	Max 8 (4 items per output)

ACCESSORIES ON REQUEST

- Gobo holder black finishing (cod. 03.ART007)

PHOTOMETRIC DATA

LED current 700mA

	mt 2 ft 6.56	mt 4 ft 13.12	mt 6 ft 19.68	mt 8 ft 26.25	mt 10 ft 32.81
3000 K					
BEAM ANGLE 8°					
lux center (lx)	4136	1034	460	258	165
foot candles (fc)	384	96	43	24	15
diameter (cm)	28	56	84	112	140
diameter (ft)	0.92	1.84	2.75	3.67	4.59