PHILIPS Lighting

TL-D Blacklight Blue

TL-D 36W BLB 1SL/25

TL-D/08 Blacklight Blue lamps are low-pressure mercury-vapor fluorescent lamps. They have an inner envelope coated with a fluorescent powder that emits long-wave UV radiation to excite luminescence.

Product data

General Information				
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
Main Application	Blacklight Blue			
Life To 50% Failures (Nom)	15000 h			
Useful Life (Nom)	12000 h			
ight Technical				
Color Code	108 [08 lead free glass]			
Color Designation	Blacklight Blue			
LLMF 2000 h Rated	10 %			
LLMF 6000 h Rated	15 %			
Operating and Electrical				
Power (Rated) (Nom)	36 W			
Lamp Current (Nom)	0.44 A			
Voltage (Nom)	103 V			
Approval and Application				
Mercury (Hg) Content (Nom)	5.0 mg			


UV				
UV-B/UV-A (IEC)	0.2 %			
UV-A Radiation 100Hr (IEC)	9.5 W			
Product Data				
Full product code	871150095115140			
Order product name	TL-D 36W BLB 1SL/25			
EAN/UPC - Product	8711500951151			
Order code	928048510805			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	25			
Material Nr. (12NC)	928048510805			
Net Weight (Piece)	211.000 g			

TL-D Blacklight Blue

Warnings and Safety


• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

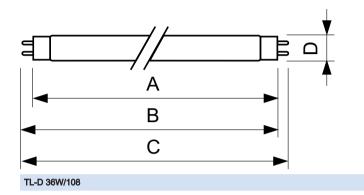

Product		D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W E	BLB 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

Photometric data

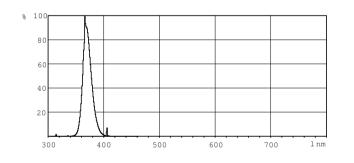

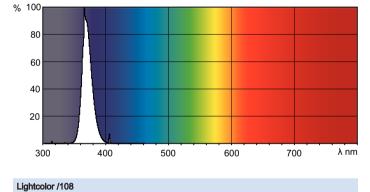

Lightcolor /108



© 2017 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.

www.lighting.philips.com 2017, July 25 - data subject to change